


ELLIPSE 6036

60" x 36" x 20"

Named after the meridians of our body—the paths along which our energy flows—the collection also brings to mind the meridian (or mid-point) of life with an invitation to relax and listen to your body and mind.

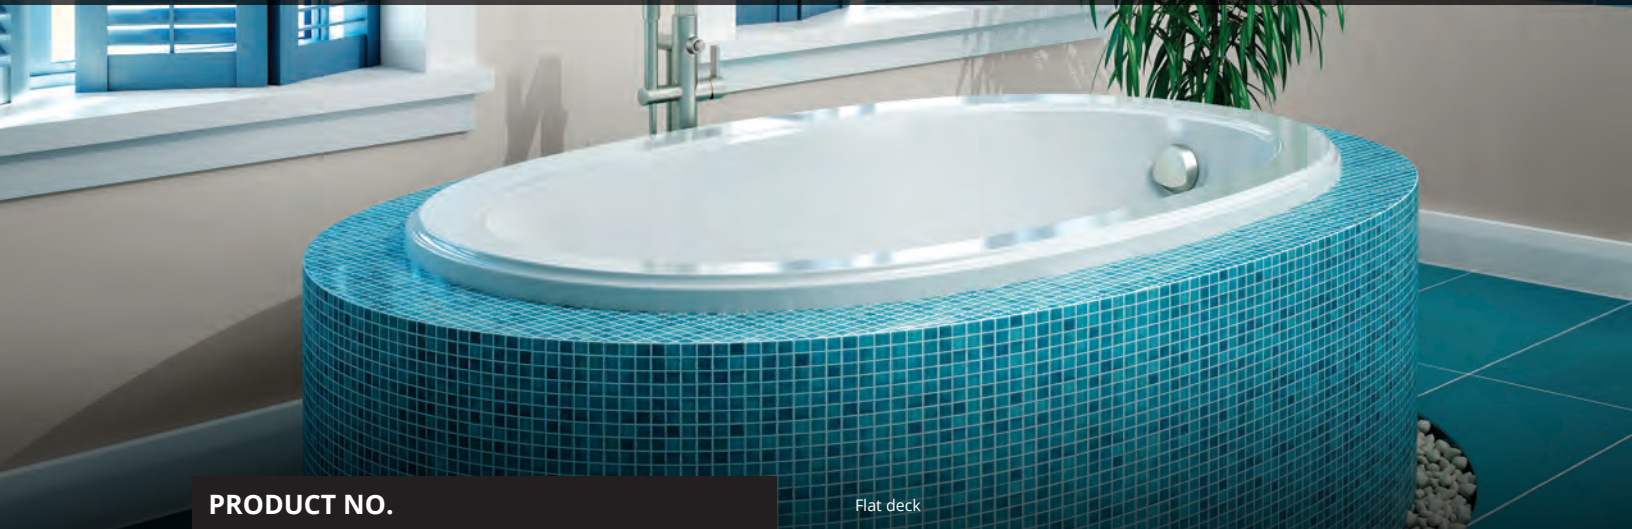

Flat deck

PRODUCT NO.

MODEL	TMU	TUB
Rolled deck	BMEFOUM0T-XX	BMEFOUM0N-XX
Flat deck	BMEFOUN0T-XX	BMEFOUN0N-XX



THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	37
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$
Geysair®	Included
AromaCloud** BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	\$
AromaCloud** BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy

FEATURES

Installation type	Drop-in
No. of bathers	37
US gallons	44

STANDARD COLOR

<div style="display: flex; gap: 10px;"> <div style="text-align: center;">  White 01 </div> <div style="text-align: center;">  Biscuit 02 </div> </div>	Included
--	----------

OPTIONS (UPCHARGE APPLICABLE)

WASTE & OVERFLOW 16" x 35" **BOVER16-XX**

Chrome 07	\$
White 01 , Biscuit 02	\$
Brushed Nickel 09 , Polished Nickel 10 , Oil-rubbed Bronze 11	\$

IF REQUIRED BY CONSTRUCTION CODE

16" x 35" Cable driven brass waste & overflow kit BOVERBR	\$
--	----



Don't forget to indicate flat or rolled deck.
* The AromaCloud® is built into the deck (factory installed).

TOTAL PRICE \$



ELLIPSE 6036




Flat deck



Rolled deck

INSTALLATION

A For flat and rolled deck: deck modified to host the AromaCloud®

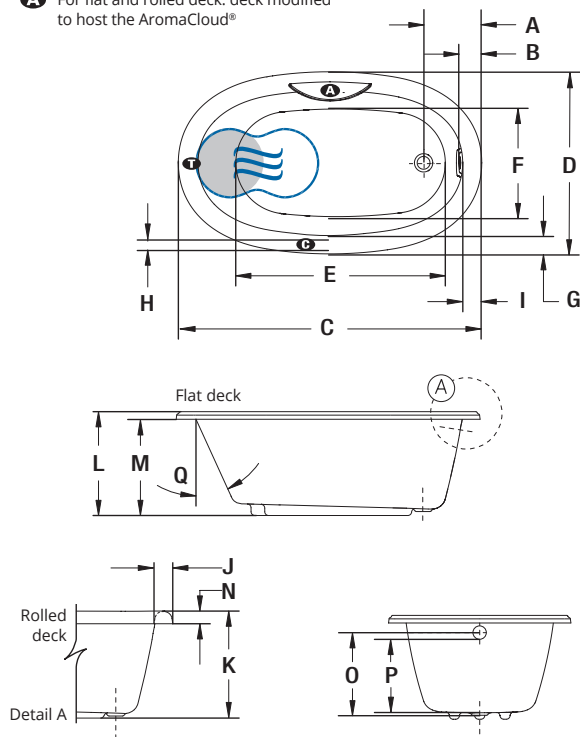

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	11 1/2"
B	Outside edge to overflow	4 1/4"
C	Total length	60"
D	Total width	36"
E	Bathing well length	42 1/8"
F	Bathing well width	21 7/8"
G	Deck width	3 7/8"
H	Flat surface width	2 1/2"
I	Deck width	3 7/8"
J	Rolled deck width	3 7/8"
K	Height from bottom of bath to top deck	21"
L	Height from bottom of bath to top deck	20"
M	Height from bottom of bath to bottom of deck	18 1/2"
N	Height from bottom of deck to top deck	2 1/2"
O	Height from drain to center of overflow	15 5/8"
P	Maximum water level	13 7/8"
Q	Slope of backrest	25°

- A** AromaCloud® position
- C** Control position when factory-installed (Mia® or DOT)
- T** Turbine position (TMU)
- Indicates heated backrest (TMU)
- ☄ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	<ul style="list-style-type: none"> - The Geysair is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access). - There is a height difference for the rolled deck (see drawing Detail A). - Available with flat deck or rolled deck.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Cutting template	# 90000034
Approx. shipping weight	110 lbs
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.